

Source         Destination         Data Field           Address         Address           192.168.1.101         192.168.1.106         Data (00101101)           Port: 1234         Port: 0060	Forwarder query for valid user / website destination	Controller response to Forwarder query	192.168.1.106   192.168.1.103   Data (00101101) Port: 0060   Port: 0080	192.168.1.103   192.168.1.106   Data (00101101) Port: 0080 Port: 0060	192.168.1.106   192.168.1.101   Data (00101101) Port: 0060   Port: 1234
( <u>r</u> )	(S)	6	9	=	<b>(12)</b>
Source AddressDestination AddressData Field Address192.168.1.101192.168.1.104www.edrtech.comPort: 1234Port: 0053	192.168.1.104   192.168.1.105   www.edrtech.com Port: 0053   Port: 1234	192.168.1.105   192.168.1.102   www.edrtech.com Port: 1234   Port: 1234	192.168.1.102	192.168.1.105   192.168.1.104   192.168.1.106 Port: 1234   Port: 0053	192.168.1.104   192.168.1.101   192.168.1.106 Port: 0053   Port: 1234
<u>—</u>	(2)	(e)	4	(c)	<u> </u>

Figure 2

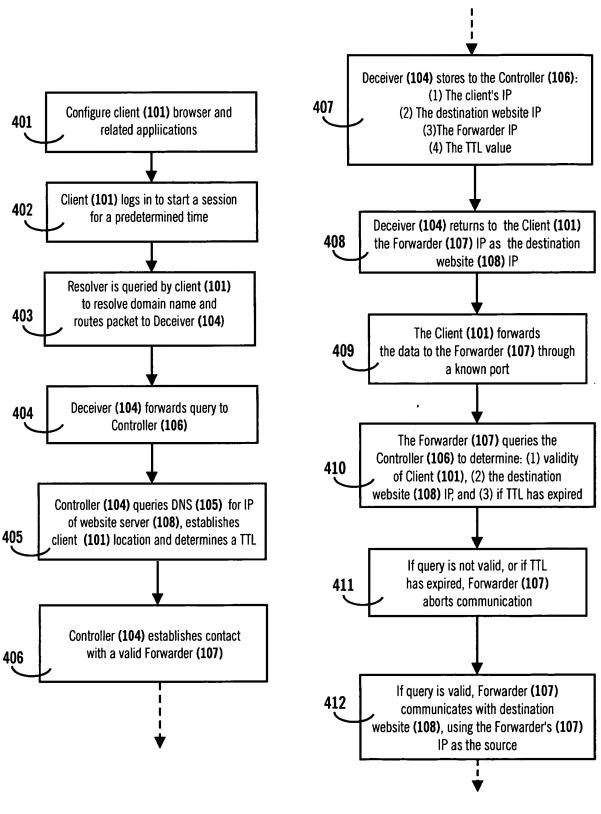


Figure 3

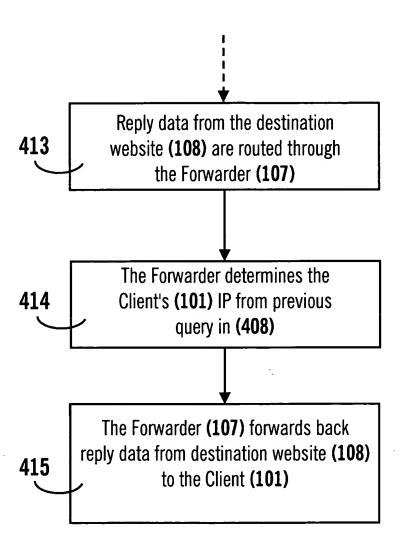


Figure 4